



Tablet Hardness Tester

with Diameter/Length & Thickness Measurement

Model: TH 1050S



LABINDIA
ANALYTICAL
WHERE COMMITMENT IS CULTURE

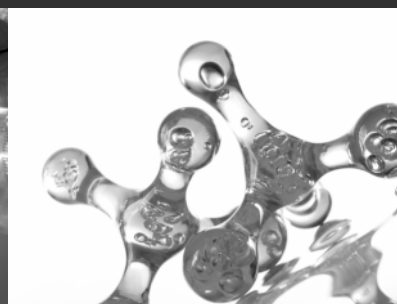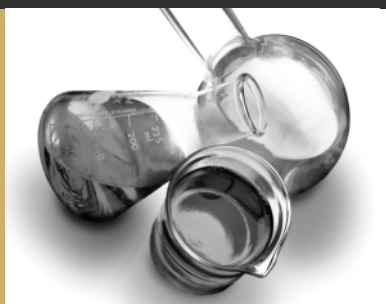

Features:

- Advance Micro-controller based user-friendly state-of-the-art product design with alphanumeric splash waterproof polyester soft keys for keyboard. User interactive software in dialogue mode for ease of operation with protection against invalid entries.
- 12 Position Carousel for Automatic measurement of tablet parameters - Thickness, Length/Diameter & Hardness. The built in Sweeping blades cleans the tablet path for removal of broken pieces, debris & dust.
- Non-Volatile memory storage of 99 methods with parameters with Alphanumeric entries of Sample Name and Identification Number for authentication.
- Automatic run can be performed continuously up to 1-99 tablets. Run can be restarted on power failure.
- Linear Displacement 0.8mm/sec with fast advance and return movement of breaking arm saves runtime.
- Daily Auto Incremented Run Number and Factory entered CUSTOMER NAME with Instrument Serial Number on report system foolproof and GLP compliant.
- Two Tier – a) ADMIN, and b) USER password protection for method editing and Validation. 10 Users can set with Name and password.
- Built-in Real Time Clock [RTC] for date and time display and on printout.
- Result resolution - 0.1N, 0.1mm or 0.01inch, as per unit selected.
- Process Stage and Compression Press no. entry and Percentage Limit for detected values of Hardness, Length & Thickness with Star mark for out of limit values.
- Validation/Calibration protocol with verification for Hardness – 3 point Load Cell calibration with Standard weights, Length/Diameter and 3 point Thickness Calibration with Standard thickness gauges.
- Quick RUN for Thickness, Length & Hardness or all parameter measurement in sequence up to 25 sample tablets with GLP information.
- Error indication on display helps user to trace the problem.
- Printer Compatibility for Deskjet, Inkjet & Dot-matrix printer.
- Ethernet Connectivity by RE01 Module and EDC80 Data capture Software (Optional).
- Quick RUN for a) Thickness b) Length & Hardness c) Hardness d) All

Reports:

- Selectable Report Format, complying with GLP requirements:
 - a) Report giving Run No., Set parameters and Actual parameters during the test process.
 - b) Report of program parameters for 99 methods, with printout of empty program numbers.
 - c) Validation report for Thickness (Optional), Diameter/Length, Hardness.
- Reports can be obtained even after resetting / power off/ power failure conditions.

Typical Specifications:

- **Control:** Micro-controller based [Advanced version of microprocessor]
- **Keyboard:** Alphanumeric splash waterproof polyester soft keys.
- **Display:** 40 x 2 line back lighted liquid crystal display [LCD]
- **Test Parameter:-** No. of Tablets = 1 – 99.
- 1.Thickness**
 - Measuring Sensor – Linear Transducer
 - Measuring Range – 0.2mm to 15.0mm.
 - Measuring Unit – mm or inch.
 - Measuring Accuracy – ± 0.06 mm.
- 2.Diameter/Length**
 - Measuring Sensor – Stepper controlled Load Touch sensed
 - Measuring Range – 2.0mm to 32.0mm.
 - Measuring Unit – mm or inch.
 - Measuring Accuracy – ± 0.06 mm.
- 3.Hardness :- Speed Control by Stepper motor**
 - Linear Displacement 0.8mm/sec with fast advance and return of breaking arm.
 - Measuring Sensor – Load Cell – Strain gauge
 - Measuring Range – 2N to 500 N. (600N – Optional)
 - Measuring Unit – N (Newton's) / Kp (Kilo Ponds) / Kgf Sc (Strong Cobb) / Pound.
 - Measuring Accuracy – ± 1 N.
- 4.Weight**
 - Manual Entry by User (for reporting purpose)
 - Automatic Balance Interface – Sartorius / Mettler when Automatic wt. Transfer option is selected.
 - **Method Storage:** 99 programs with parameters.
 - **Data Storage:** Available with Non-Volatile memory.
 - **Report Format:**
 - a) GLP & Pharmacopoeia compliant report with Statistics (Avg, Min, Max and RSD)
 - b) Program parameter Report.
 - c) Validation Reports
 - **Output:**
 - a) Centronics parallel port for Dot matrix / Desk jet Printer.
 - b) RS232 C ports for – i) Balance connectivity (Sartorius/Mettler)
 - ii) PC Connectivity for Data Download.
 - **Instrument weight:** 18kgs.
 - **Dimensions:** 360W x 320H x 350D mm.
 - **Power:** 230Vac, + 10%, 50 Hz, 65 Watts. /110V(60Hz) option available.
 - **Environmental Operating Conditions:**
 - a) Operation: Indoor.
 - b) Temperature: 15 to 35° C.
 - c) Humidity: 5 to 90% non-condensing.

LABINDIA
ANALYTICAL
WHERE COMMITMENT IS CULTURE

www.labindia-analytical.com / For Enquiries: sales.mfd@labindia.com

Labindia Analytical Instruments Pvt. Ltd.

HEAD OFFICE:

Thane: 201, Nand Chambers, LBS Marg, Near Vandana Cinema, Thane (W) - 400 602.
Tel.: +91-22-2598 6000 / 2598 6110 Fax: +91-22-2541 0420 / 2533 5940 E-mail: sales.mfd@labindia.com

REGIONAL OFFICES:

Delhi: Tel.: +91-11-4330 6001 / 10

Chennai: Tel.: +91-44-2434 7008 / 2432 0352

Kolkatta: Tel.: +91-33-2466 3362

BRANCH OFFICES:

Bangalore: Tel.: +91-80-2323 0919 / 20 / 21

Lucknow: Tel.: +91-522-2346 535 / 2346 496

Hyderabad: Tel.: +91-40-4444 3456

Tiruvanthapuram: Tel.: +91-471-2324 064 / 2320 082

Vadodara: Tel.: +91-265-2986 005 / 2986 006

Pune: Tel.: +91-20-2545 3386

Chandigarh: Tel.: +91-172-4090 001-07 / 4090 009

FACTORY: Plot No. EL-72, Electronic Zone, TTC Industrial Area, Thane Belapur Road, Navi Mumbai - 400 705.

Tel.: +91-22-2762 6660 / 61 / 62 / 63 / 6516 3480 / 81 / 6107 6666 Fax: +91-22-27626664 E-mail: lipfactory@vsnl.net

APPLICATION & TRAINING CENTRE: R-909, TTC Industrial Area, Thane Belapur Road, Rabale, Navi Mumbai - 400 701.

Tel.: +91-22-2760 6955 / 6107 6555 Fax: +91-22-2760 6706



Striving to become the best individuals, we endeavour to foster the best team. Performing sensibly, we try to achieve the best efficiency. Working innovatively, we seek to make the best products. Listening patiently, we excel to offer the best service. So, no matter what you needs are, come to us, GET THE BEST

LABINDIA reserve the right to change specification without notice as part of its continuous programme of product development.